

## Journal of Applied and Theoretical Physics Research

### Separation and Recovery of Vanadium and Chromium from Liquor Solution by Fractional Precipitation

Hao Peng\* and Jing Guo

College of Chemistry and Chemical Engineering, Yangtze Normal University, Chongqing 408102, PR China

\*Corresponding author: HaoPeng, College of Chemistry and Chemical Engineering, Yangtze Normal University, Chongqing 408102, PR China; E mail: cqpenghao@126.com

Article Type: Short Communication, Submission Date: 16 February 2018, Accepted Date: 15 March 2018, Published Date: 27 April 2018.

Citation: Hao Peng and Jing Guo (2018) Separation and Recovery of Vanadium and Chromium from Liquor Solution by Fractional Precipitation. J Apl Theol 2(2): 1-4. doi: <https://doi.org/10.24218/jatpr.2018.16>.

Copyright: © 2018 Hao Peng and Jing Guo. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

#### Abstract

Vanadium and chromium was hard to separate due to their similar chemical and physical properties. Fractional precipitation technology with melamine and lead sulfate was conducted to separate and recover vanadium and chromium. Results showed that melamine played great adsorption efficiency of vanadium and lead sulfate could precipitate chromium successfully.

**Keywords:** Vanadium, Melamine, Chromium, Lead sulfate.

Vanadium and chromium are important metals used for manufacturing iron, steel non-ferrous metals, and petrochemicals because of their excellent physicochemical properties [1-3]. Many hydrometallurgical processes had been applied to leach out vanadium and chromium, including sub-molten salt technology [4,5], alkaline electrochemical advanced oxidation process [6-9], roasting-leaching technology [10-12], pressure leaching [13], etc. However, the separation of vanadium and chromium in the leaching solution was still a challenge for most researchers. The most common technology for vanadium recovery was ammonium precipitation technology [14-16], ammonium sulfate or ammonium chloride was added into the leaching solution to generate ammonium vanadate or ammonium polymer vanadate (APV) with low solubility in acidic solution about pH 2.0-2.5. However, the acidic wastewater was hard to purify. Other way, the recovery of chromium was to generate chromic anhydride with chromium solution.

In this paper, we introduced a fractional precipitation technology to separate and recover chromium and vanadium. The technical route is displayed in Figure 1. The fractional precipitation technology was conducted with melamine and lead sulfate as precipitation agent. The solution firstly reacted with melamine and vanadium existed in  $\text{VO}_2^+$  was adsorbed which stayed in the

precipitation, while chromium was still in the filtrate solution. And then added some lead sulfates into the filtrate and reacted upon 60 min, the chromium was precipitated as  $\text{PbCrO}_4$ . Thus, vanadium and chromium were efficiently separated and recovered.

Melamine, which has three free amino groups and three aromatic nitrogen atoms in its molecule, can be potentially used as an adsorbent for metal ions [17-21]. Our recent research indicated that melamine had good potential for vanadium adsorption. The adsorption efficiency was over 99.97% under optimal conditions [22,23].

Factors associated with adsorption efficiency of vanadium by melamine were systematically investigated, including initial pH value of solution, molar ratio of melamine to vanadium, reaction temperature and reaction time. Results showed in Figure 2 indicated that melamine could be a great adsorption agent for vanadium recovery. And the initial pH of vanadium solution and dosage of melamine were the main factor affected the adsorption efficiency of vanadium.

Chemical precipitation was an efficient way to recover metal ions from solution based on the  $K_{sp}$  (solubility product constant). In this paper, lead sulfate was chosen to recover chromium from the solution based on the difference of the  $K_{sp}$  between lead sulfate and lead chromate, for which was  $1.6 \times 10^{-8}$  and  $2.8 \times 10^{-13}$  [24], respectively. The effects of parameters on the precipitation efficiency of chromium including initial pH of solution, reaction temperature, reaction time and dosage of lead sulfate were studied [25].

Figure 3 indicates that chromium was successfully precipitated by lead sulfate, and also the concentration of chromium could be reduced from 0.2 mol/L to 0.15 mmol/L at optimal

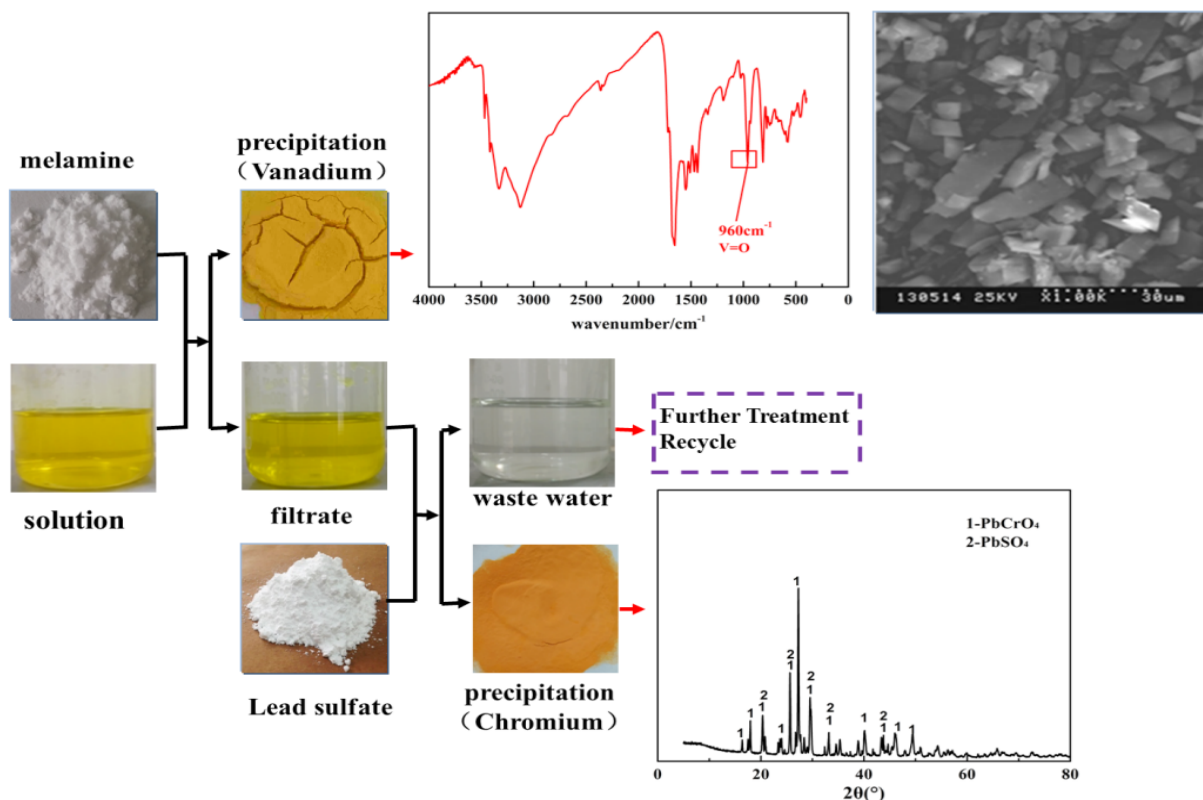


Figure 1: The technical route of the experiment

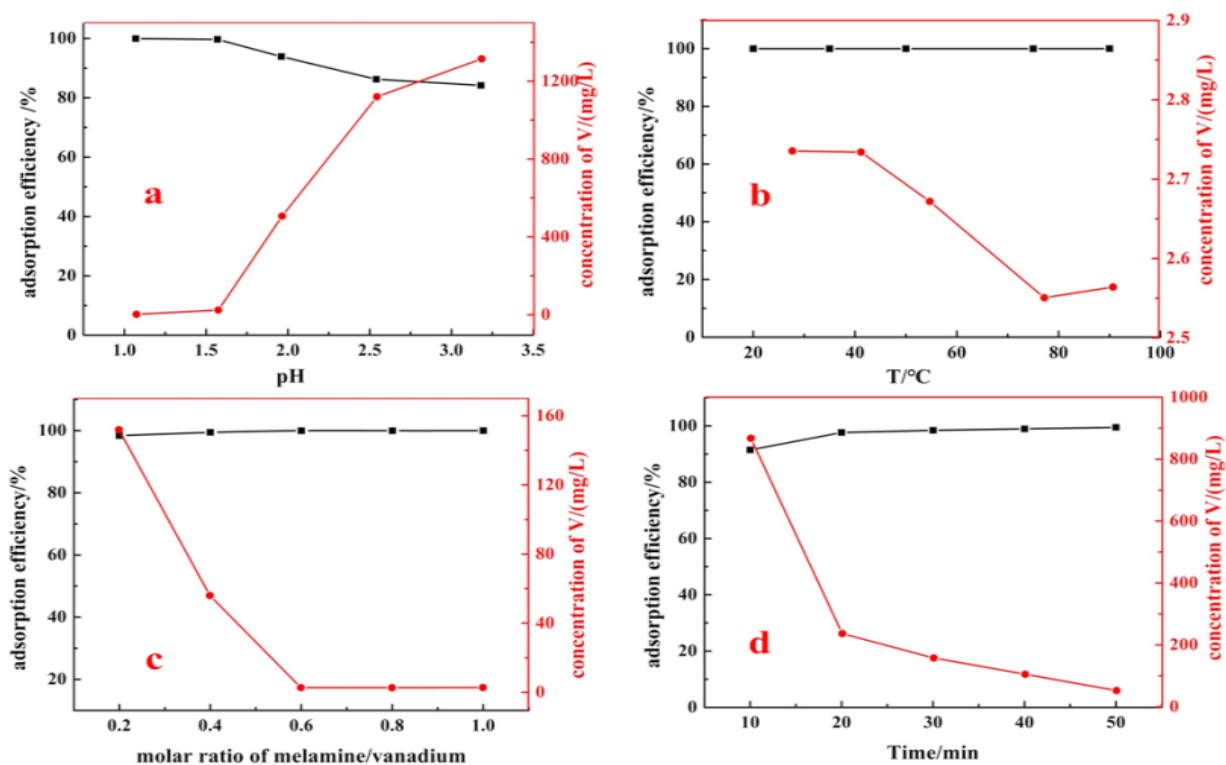
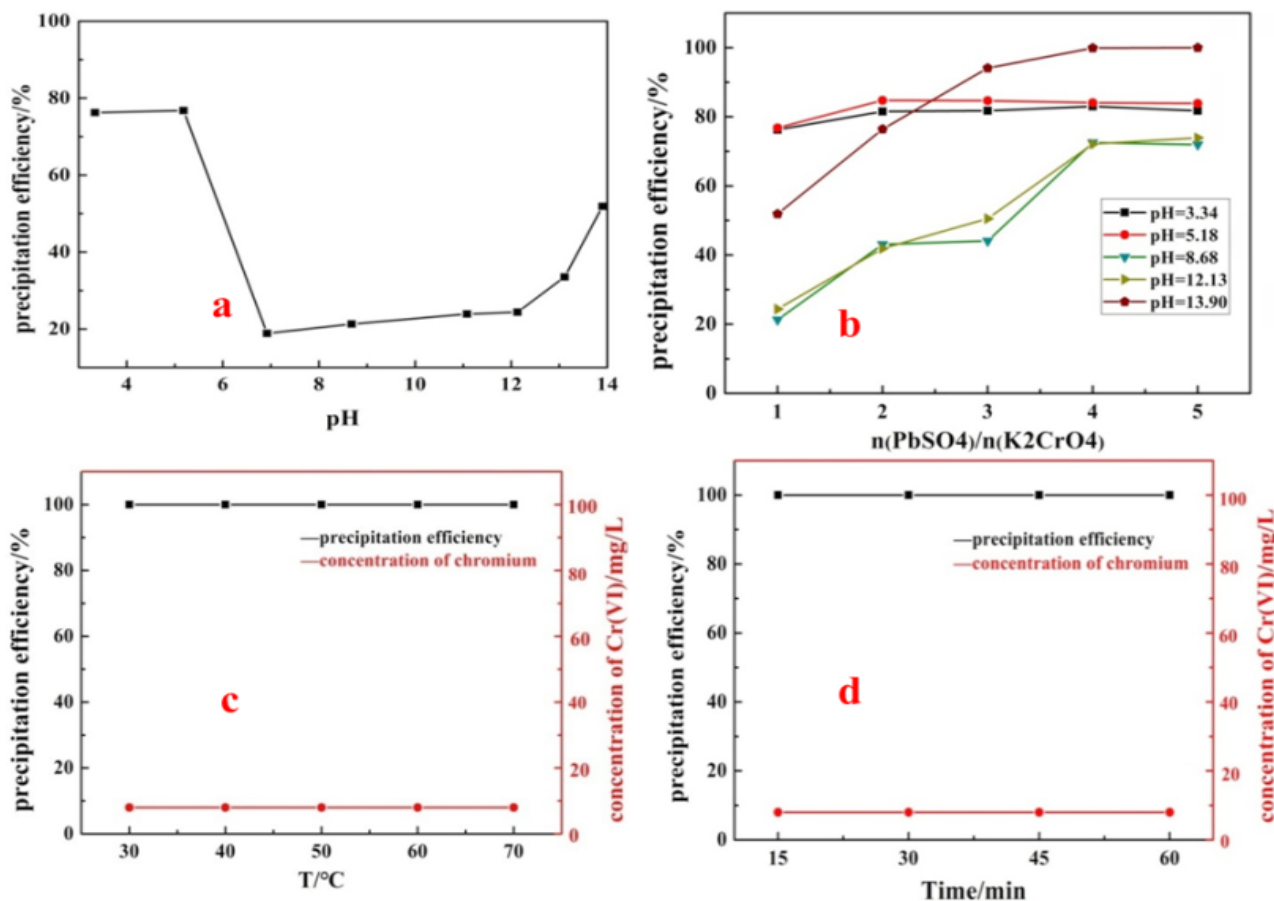


Figure 2: Effect of parameters on adsorption of vanadium with melamine: a) initial pH of vanadium solution; b) reaction temperature (T); c) molar ratio of melamine to vanadium; d) reaction time



**Figure 3:** Effect of parameters on precipitation efficiency of chromium: a) pH; b) molar ratio of lead sulfate to potassium chromate; c) reaction temperature (T); d) reaction time

conditions. During the reaction process, the initial pH value of solution and dosage of lead sulfate had big influence on the precipitation efficiency of chromium (VI), while the effect of reaction temperature and reaction time could be ignored. The precipitation was composed of  $PbCrO_4$ ,  $PbSO_4$  and other oxides contained lead. Other way, the lead sulfate was all gone into the precipitation, not dissolved in the filtrate and would not cause secondary pollution during the precipitation process.

In summary, melamine could efficiently adsorb vanadium and lead sulfate could precipitate chromium effectively. A new technology combined these two technologies could be an efficient way to separate and recover vanadium and chromium from liquor solution.

### Acknowledgements

This work was supported by Talent Introduction Project of Yangtze Normal University (2017KYQD117).

### Reference

1. Moskalyk RR, Alfantazi AM. Processing of vanadium: a review. *Minerals Engineering*. 2003; 16(9):793-805. doi: [https://doi.org/10.1016/S0892-6875\(03\)00213-9](https://doi.org/10.1016/S0892-6875(03)00213-9).
2. Peng H, Liu Z, Tao C. Electrochemical oscillation of vanadium ions in anolyte. *Journal of Electrochemical Science and Engineering*. 2017; 7:139.

3. Peng H, Liu Z, Tao C. Chaotic Phenomenon in Vanadium Redox Flow Battery. *International Journal of Petrochemical Science & Engineering*. 2017; 2:3.
4. Liu H, Du H, Wang D, Wang S, Zheng S, Zhang Y. Kinetics analysis of decomposition of vanadium slag by KOH sub-molten salt method. *Transactions of Nonferrous Metals Society of China*. 2013; 23(5):1489-1500. doi: [https://doi.org/10.1016/S1003-6326\(13\)62621-7](https://doi.org/10.1016/S1003-6326(13)62621-7).
5. Xu HB, Zheng SL, Zhang Y, Li ZH, Wang ZH. Oxidative leaching of a Vietnamese chromite ore in highly concentrated potassium hydroxide aqueous solution at 300°C and atmospheric pressure. *Minerals Engineering*. 2005; 18(5):527-535. doi: <https://doi.org/10.1016/j.mineng.2004.08.002>.
6. Xue Y, Zheng S, Sun Z, Zhang Y, Jin W. Alkaline electrochemical advanced oxidation process for chromium oxidation at graphitized multi-walled carbon nanotubes. *Chemosphere*. 2017; 183:156-163. doi: 10.1016/j.chemosphere.2017.05.115.
7. Peng H, Liu Z, Tao C. Leaching Kinetics of Vanadium with Electro-oxidation and  $H_2O_2$  in Alkaline Medium. *Energy & Fuels*. 2016; 30:7802-7807.
8. Peng H, Liu Z, Tao C. Selective leaching of vanadium from chromium residue intensified by electric field. *Journal of Environmental Chemical Engineering*. 2015; 3(2):1252-1257. doi: <https://doi.org/10.1016/j.jece.2015.03.031>.
9. Wang Z, Zheng S, Wang S, Qin Y, Du H, Zhang H. Electrochemical decomposition of vanadium slag in concentrated NaOH solution. *Hydrometallurgy*. 2015; 151:51-55. doi: <https://doi.org/10.1016/j.hydromet.2014.10.017>.

10. Zhang J, Zhang W, Zhang L, GuS. Mechanism of vanadium slag roasting with calcium oxide. *International Journal of Mineral Processing*. 2015; 138:20-29. doi: <https://doi.org/10.1016/j.minpro.2015.03.007>.
11. Zeng X, Wang F, Zhang H, Cui L, Yu J, XuG. Extraction of vanadium from stone coal by roasting in a fluidized bed reactor. *Fuel*. 2015; 142:180-188. doi: <https://doi.org/10.1016/j.fuel.2014.10.068>.
12. Kim E, Spooren J, Broos K, Horckmans K, Quaghebeur M, Vrancken KC. Selective recovery of Cr from stainless steel slag by alkaline roasting followed by water leaching. *Hydrometallurgy*. 2015; 158:139-148. doi: <https://doi.org/10.1016/j.hydromet.2015.10.024>.
13. Chen G, Wang X, Du H, Zhang Y, Wang J, Zheng S, et al. A clean and efficient leaching process for chromite ore. *Minerals Engineering*. 2014; 60:60-68. doi: <https://doi.org/10.1016/j.mineng.2014.01.025>.
14. Wang X, Wang M, Shi L, Hu J, Qiao P. Recovery of vanadium during ammonium molybdate production using ion exchange. *Hydrometallurgy*. 2010; 104(2):317-321. doi: <https://doi.org/10.1016/j.hydromet.2010.06.012>.
15. Mazurek K, Białowicz K, Trypuć M. Recovery of vanadium, potassium and iron from a spent catalyst using urea solution. *Hydrometallurgy*. 2010; 103(1-4):19-24. doi: <https://doi.org/10.1016/j.hydromet.2010.02.008>.
16. Navarro R, Guzman J, Saucedo J, Revilla J, Guibal E. Vanadium recovery from oil fly ash by leaching, precipitation and solvent extraction processes. *Waste Manag*. 2007; 27:425-438.
17. Huang MR, Lu HJ, Li XG. Synthesis and strong heavy-metal ion sorption of copolymer microparticles from phenylenediamine and its sulfonate. *Journal of Materials Chemistry*. 2010; 22:17685.
18. Huang MR, Ding YB, Li XG, Liu Y, Xi Y, Gao CL. Synthesis of semiconducting polymer microparticles as solid ionophore with abundant complexing sites for long-life Pb (II) sensors. *ACS applied materials & interfaces*. 2014; 6(24):22096-22107. doi: 10.1021/am505463f.
19. Li XG, Feng H, Huang MR, Gu GL, Moloney MG. Ultrasensitive Pb (II) potentiometric sensor based on copolyaniline nanoparticles in a plasticizer-free membrane with a long lifetime. *Analytical chemistry*. 2012; 84:134-140.
20. Lü QF, Huang MR, Li XG. Synthesis and heavy-metal-ion sorption of pure sulfophenylenediamine copolymer nanoparticles with intrinsic conductivity and stability. *Chemistry-A European Journal*. 2007; 13(21):6009-6018.
21. Huang MR, Peng QY, Li XG. Rapid and effective adsorption of lead ions on fine poly (phenylenediamine) microparticles. *Chemistry*. 2006; 12(16):4341-4350.
22. Peng H, Liu H, Tao C. Adsorption Process of Vanadium (V) with Melamine. *Water, Air, & Soil Pollution*. 2017; 228.
23. Peng H, Liu Z, Tao C. Adsorption kinetics and isotherm of vanadium with melamine. *Water Sci Technol*. 2017; 75(10):2316-2321. doi: 10.2166/wst.2017.094.
24. Dalun Y, Jianhua H. *Handbook of Practical Inorganic Thermodynamic Data*. Beijing: Metallurgical Industry Press; 2002.
25. Peng H, Guo J, Li B, Liu Z, Tao Z. High-efficient Recovery of Chromium (VI) with Lead Sulfate. *Journal of the Taiwan Institute of Chemical Engineers*. 2018; 85:149-154. doi: <https://doi.org/10.1016/j.jtice.2018.01.028>.