

Spectrum of the Torsional and Longitudinal Natural Frequencies of Cantilever with an Arbitrary Number of Layers with the Piece wise Constant Mechanical Properties, Densities and Thicknesses

Ivo Stachiv

National Kaohsiung University of Applied Sciences, Kaohsiung, Taiwan

***Corresponding author:** Ivo Stachiv, National Kaohsiung University of Applied Sciences, Kaohsiung, Taiwan; E mail: stachiv@kuas.edu.tw

Article Type: Research, **Submission Date:** 08 April 2016, **Accepted Date:** 29 April 2016, **Published Date:** 21 December 2016.

Citation: Ivo Stachiv (2016) Spectrum of the Torsional and Longitudinal Natural Frequencies of Cantilever with an Arbitrary Number of Layers with the Piece wise Constant Mechanical Properties, Densities and Thicknesses. JApI Theol 1(2): 1-4.

Copyright: © 2016 Ivo Stachiv. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

Abstract

Here, we derived analytically a transcendental equation, which positive roots are the spectrum of torsional and longitudinal natural frequencies of cantilever composed of an arbitrary number of layers with the piecewise constant mechanical properties, densities and thicknesses. This transcendental equation has been obtained in the Laplace image space and the one connects the mechanical properties, density and layer thickness. The present solution can be particularly useful for either a non-destructive material testing or design of the cantilever structures.

Keywords: Torsional and Longitudinal resonant frequencies, Material patterning, Atomic Force Microscopy.

Introduction

The rapid development of new materials allowed researchers to create heterogeneous structures with specific functional properties. Such structures often consist of layers with different thicknesses, cross sectional areas and mechanical properties. To ensure that the prepared material meets required functional properties or to check the structural degradation of the object in adverse environmental conditions, it is necessary to determine the basic mechanical properties such as elastic moduli or thicknesses of individual layers.

The material characterization is performed by using either destructive (DTs) [1] or non-destructive techniques (NDTs) [2]. DTs usually provide a more reliable assessment of the properties of the structure than NDTs. However, the destruction or damage caused by DTs strongly affects the functional quality of the tested structure itself. NDTs allow one to test or to inspect an object without impairing its function. Among NDTs, ultrasonic methods are commonly employed to characterize multilayered structures [3-17]. In NDTs, the required information about the object's elastic moduli and layers' thicknesses is recovered from the knowledge of the spectrum of either resonance peaks or natural frequencies of an inspected object [18-20].

The spectrum of the resonance peaks contains information

about the quality factor and the resonance frequencies [21]. The resonance frequencies are used to determine the elastic moduli and layer thicknesses while the quality factors yield information about the energy-attenuating properties of the object. The analysis of experimental data becomes simpler if a sample has the shape of a rod with its length L substantially larger than its radius R ($R/L \ll 1$). Nevertheless, the interpretation of experimental data still remains quite a complicated problem and is usually based on the simple model of the damped harmonic oscillator [8]. Despite the fact that the harmonic oscillator model correctly catches the qualitative behavior of the resonance and attenuation, the quantitative results are far from the actual values and, as to the spectrum of the natural frequencies it cannot give in principle.

The natural frequencies of a rod with homogeneous and discontinuous properties can be found by solving the partial differential equation and the corresponding Sturm-Liouville problem [21]. However, the solution of the partial differential equations is often a very complicated problem and therefore it is usually obtained by using numerical methods [22,23]. Such methods, of course, can give quite accurate results, but they may not provide an adequate insight into the physics of the problem. Hence, the exact solutions of problems are desirable, even though they are often difficult to obtain.

Throughout the decades, plenty of theoretical works concerning vibrating non-uniform beams or rods have been published [24-32]. A couple of years ago, a study of the vibrating mechanical systems with N -stepwise constant properties has been performed [33,34]. It has been shown that natural frequencies are the roots of the transcendental equation obtained directly from the Laplace imaginary space.

In this paper, we carry out the systematic investigation of longitudinal and torsional vibrations of the rod with homogeneous and discontinuous material or geometric properties. Particular attention is given to a cantilever rod that undergoes an action of periodical external force, where the obtained results can be directly used in many problems ranging from civil or mechanical

engineering to material testing and micro/nano-fabrication.

Theoretical ground

Following the approach of Fedorchenko et al. [33,34], the longitudinally oscillating rod with an arbitrary number of material and geometric discontinuities (N) can be described by the following system of the partial differential equations

$$\rho_i u_{itt} - E_i u_{ixx} = 0, h_{i-1} < x < h_i, i = 1, 2, \dots, N, h_0 = 0, h_N = l, \quad (1a)$$

with the following matching conditions

$$u_i(h_i, t) = u_{i+1}(h_{i+1}, t), \quad (1b)$$

$$k_i u_{ix}(h_i, t) = k_{(i+1)} u_{(i+1)x}(h_{i+1}, t), \quad (1c)$$

where $k_i = EA_i$, E , ρ and A are the elastic modulus, density and the cross sectional area of rod, respectively. For torsional oscillations of rod with an arbitrary number of discontinuous properties the equation of motion reads

$$\rho_i I_{pi} \theta_{itt} - G_i K_i \theta_{ixx} = 0 \quad (2a)$$

and the following matching conditions are imposed

$$\theta_i(h_i, t) = \theta_{i+1}(h_{i+1}, t), \quad (2b)$$

$$b_i \theta_{ix}(h_i, t) = b_{(i+1)} \theta_{(i+1)x}(h_{i+1}, t), \quad (2c)$$

where $b_i = G_i K_i$, G is shear modulus, K is a geometric function that depends on the cantilever cross section [35] and I_p is the polar moment of inertia of beam.

Longitudinally oscillating cantilever with one discontinuity

The method of solution and further analysis are going to be illustrated on the longitudinally oscillating rod with one discontinuity (see Figure 1). The motion of the one is described by Eq. (1) with $i = 1, 2$. To close the problem, the following initial and boundary conditions are imposed

$$u(x, 0) = u_t(x, 0) = 0, \quad (3a)$$

$$u_1(0, t) = 0, u_{2x}(l, t) = \eta_2(t), \quad (3b)$$

where $\eta_2(t) = F/(E_2 A_2) \sin pt = I_2 \sin pt$, F is applied external force and p is a simple frequency. Now, applying the Laplace transform to Eqs. (1) and (3) (for method of solution see Refs. [33,34,36], the solutions of $U_i(x, s)$ in the imaginary space yield

$$U_1(x, s) = I_2 p k_2 \sinh(\xi_1 x)/D(s), 0 < x < h, \quad (4a)$$

$$U_2(x, s) = (I_2 p / \xi_2) \{ k_1 \xi_1 \cosh(\xi_1 h) \sinh[\xi_2(x-h)] + k_2 \xi_2 \sinh(\xi_1 h) \cosh[\xi_2(x-h)] \} / D(s), h < x < l, \quad (4b)$$

where $\xi_i = s/c_i$, $c_i = (E_i/\rho_i)^{1/2}$, $D(s) = (p^2 + s^2)d(s)$ and $d(s) = \{ k_1 \xi_1 \cosh(\xi_1 h) \cosh[\xi_2(x-h)] + k_2 \xi_2 \sinh(\xi_1 h) \sinh[\xi_2(x-h)] \}$.

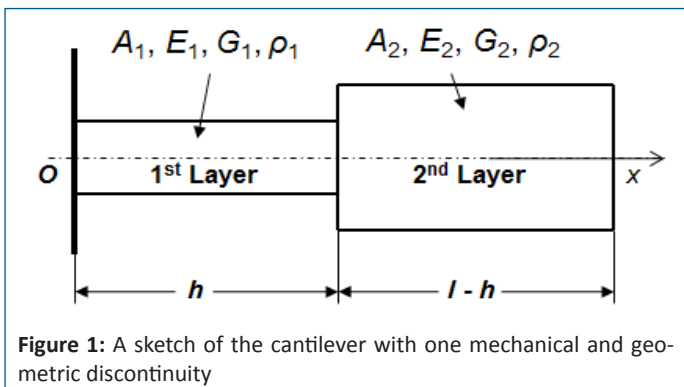


Figure 1: A sketch of the cantilever with one mechanical and geometric discontinuity

It is evident from structure of Eq. 4 that both $U_i(x, s)$ have the same common denominator $D(s)$ with simple poles at $\pm ip$ and a countable set of poles given by the equation $d(s) = 0$. The simple poles at $\pm ip$ represent a pure periodical vibration responsible for the resonance. Whereas for the poles given by equation $d(s) = 0$ correspond to the natural frequencies of the system, i.e. when external force coincides with a roots s_n of equation $d(s) = 0$, then function U_i has poles of the second order and, consequently, the solution contains resonance term [37]. Introducing a new variable $\gamma = is$ and using trigonometric identities $\sin(ix) = i \sinh x$ and $\cos(ix) = \cosh x$, equation $d(s) = 0$ yields

$$k_2 c_1 \tan[\gamma(l-h)/c_2] = k_1 c_2 \cot(\gamma h/c_1). \quad (5)$$

Now by using the relationships for multiplications of the goniometric functions [38], Eq. (5) can be written in the following form

$$(k_2 c_1 + k_1 c_2) \cos\{\gamma[h c_2 + (l-h)c_1]/(c_1 c_2)\} = (k_2 c_1 - k_1 c_2) \cos\{\gamma[h c_2 - (l-h)c_1]/(c_1 c_2)\}. \quad (6)$$

Evidently, letting $h = 0$ or l in Eq. (6) yields the well-known equation for the natural frequencies of the homogeneous cantilever. Since in the real applications, the cantilevers consist of multiple discontinuities, therefore it is necessary to derive general expression for natural frequencies.

Natural frequencies of the cantilever with an arbitrary number of mechanical and geometric discontinuities (torsional and longitudinal)

The general form of the transcendental equation for an arbitrary number of discontinuous properties can be obtained directly from a Laplace image space of the solution of the problem given by Eqs. (1) and (2). The transcendental equation for an arbitrary number of discontinuities can be derived by following the approach previously applied for a longitudinally oscillating rod with one discontinuity. Solving the system of the N – algebraic equations with given boundary and matching conditions, the complex space solution and correspondingly the transcendental equation $d(s)=0$ is found.

Omitting the bulky and time consuming intermediate algebraic manipulations, the transcendental equation for an arbitrary number of discontinuities yields

$$\sum_{m=1}^{2^{(N-1)}} \left\{ \cos \sum_{i=1}^N \left((-1)^{q_i+1} \gamma \varphi_i \right) \prod_{i=1}^{[N-1]} Q_i \right\} = 0, \quad (7)$$

here $q_i = \left\lfloor \frac{m}{2^{i-2}} \right\rfloor$ with $q_1 \equiv 1$, $Q_i = [P_i + (-1)^{q_i+q_{i+1}} P_{i+1}]$ and for longitudinal case: $P_i = k_i/c_2$, $\varphi_i = h_i/c_p$, while for torsional case $P_i = b_i/v_p$, $\varphi_i = h_i/v_p$, and $v_i = \sqrt{\frac{G_i K_i}{\rho_i I_{pi}}}$.

For instance, the transcendental equation for the four layered cantilever ($N = 4$) reads

$$(P_1 + P_2)(P_2 + P_3)(P_3 + P_4) \cos[\gamma(\varphi_1 + \varphi_2 + \varphi_3 + \varphi_4)] + (P_1 - P_2)(P_2 - P_3)(P_3 + P_4) \cos[\gamma(\varphi_1 - \varphi_2 + \varphi_3 + \varphi_4)] + (P_1 + P_2)(P_2 - P_3)(P_3 - P_4) \cos[\Lambda(\varphi_1 + \varphi_2 - \varphi_3 + \varphi_4)] + (P_1 - P_2)(P_2 + P_3)(P_3 - P_4) \cos[\gamma(\varphi_1 - \varphi_2 - \varphi_3 + \varphi_4)] + (P_1 + P_2)(P_2 + P_3)(P_3 - P_4) \cos[\gamma(\varphi_1 + \varphi_2 + \varphi_3 - \varphi_4)] + (P_1 - P_2)(P_2 - P_3)(P_3 - P_4) \cos[\gamma(\varphi_1 - \varphi_2 + \varphi_3 - \varphi_4)] +$$

$$(P_1 + P_2)(P_2 - P_3)(P_3 + P_4) \cos [\gamma(\varphi_1 + \varphi_2 - \varphi_3 - \varphi_4)] + (P_1 - P_2)(P_2 + P_3)(P_3 + P_4) \cos [\gamma(\varphi_1 - \varphi_2 - \varphi_3 - \varphi_4)]. \quad (8)$$

Conclusions

In this paper, theoretical investigation of the cantilever longitudinal and torsional oscillations with homogeneous and discontinuous properties has been carried out. The fundamental solution of the problem has been obtained. We show that the natural frequencies are the positive roots of the transcendental equation obtained directly from the Laplace image of the solution of the considered problem. The general form of the transcendental equation for an arbitrary number of discontinuous material (elastic/shear moduli and density) and geometric (diameter and layer length) properties has been derived for a cantilever. It allows one to use these results for determination of material properties in vibrational analysis of various cantilever based systems.

References

1. Callister WD. *Material science and engineering: An introduction*. 5th edition. New York: John Wiley & Sons Inc; 2000.
2. Halmshaw R. *Non-destructive testing (Metallurgy & material science)*. 2nd edition. Oxford: Edward Arnold; 1991.
3. Guyott CCH, Cawley P. Evolution of the cohesive properties of the adhesive joints using ultrasonic spectroscopy. *NDT International*. 1988; 21:233-240.
4. Kundu T. Inversion of acoustic material signature of layered solids. *Journal of Acoustical Society of America*. 1992; 91:591-600.
5. Krause J. Thickness measurement on multilayered structures by SAW dispersion. *Ultrasonics*. 1994; 32:195-199.
6. Maynard J. Resonant ultrasound spectroscopy. *Physics Today*. 1996; 49:26-31.
7. Kim BG, Lee S, Kishi T. Time-domain reflection field analysis for ultrasonic evaluation of thin layered media. *NDT & E International*. 1996; 29:317-322.
8. Migliory A, Sarrao JL. *Resonant ultrasound spectroscopy: applications to physics, material measurements, and non-destructive evaluation*. New York: John Wiley & Sons INC; 1997.
9. Li MX, Wang XM, Mao J. Thickness measurement of a film on a substrate by Low-frequency ultrasound. *Chinese Physics Letters*. 2004; 21:870-873.
10. Zadler BJ, Le Rousseau JHL, Scales JA, Smith ML. Resonant ultrasound spectroscopy: theory and application. *Geophysical Journal International*. 2004; 156:154-169.
11. Plesek J, Kolman R, Landa M. Using finite element method for the determination of elastic moduli by resonant ultrasound spectroscopy. *Journal of Acoustical Society of America*. 2004; 116:282-287.
12. Yapura CL, Kinra VK, Maslov K. Measurement of six acoustical properties of a three-layered medium using resonant frequencies. *Journal of Acoustical Society of America*. 2004; 115:57-65.
13. Alfano M, Pagnotta. A non-destructive technique for the elastic characterization of thin film isotropic plates. *NDT&E International*. 2006; 40:112-120.
14. Laux D, Ferrandis JY, Leveque G, Gatt JM. Elastic properties of composites: Periodical homogenisation technique and experimental comparison using acoustic microscopy and resonant ultrasonic spectroscopy. *Ultrasonics*. 2006; 45:104-112.
15. Kaplan G, Darling TW, McCall KR. Resonant ultrasonic spectroscopy and homogeneity in polycrystals. *Ultrasonics*. 2009; 49:139-142.
16. Shang LY, Zhang ZL, Skallerud B. Evaluation of fracture mechanics parameters in multilayered structures with weak singularities. *International Journal of Solids and Structures*. 2009; 46:1134-1148.
17. Kannajosyula SP, Chillara VK, Balasubramaniam K, Krishnamurthy CV. Simultaneous measurement of ultrasonic longitudinal wave velocities and thicknesses of a two layered media in the absence of an interface echo. *Review of Scientific Instruments*. 2010; 81:105101-1-105101-7.
18. Nakamura N, Ogi H, Hirao M. Elastic constants of chemical-vapor-deposition thin films: resonance ultrasound spectroscopy with laser-Doppler interferometry. *Acta Materialia*. 2004; 52:765 – 771.
19. Zhou Ch Z, Li MX, Mao J, Wang XM. Determination of thickness of an inaccessible thin film under a multilayered system from natural frequencies. *Chinese Physics Letters*. 2008; 25:1333-1335.
20. Nakamura N, Nakashima T, Oura S, Ogi H, Hirao M. Resonant-ultrasound spectroscopy for studying annealing effect on elastic constant of thin film. *Ultrasonics*. 2010; 50:150-154.
21. Churchill RV. *Operational Mathematics*. 3rd edition. New York: McGraw-Hill Comp; 1972.
22. Nieves FJ, Bayon A, Gascon F. Optimalization of the Ritz method to calculate axisymmetric natural vibration frequencies of cylinders. *Journal of Sound and Vibration*. 2008; 311:588-596.
23. Ding H, Chen LQ. Galerkin methods for natural frequencies of high-speed axially moving beams. *Journal of Sound and Vibration*. 2010; 329:3484-9494.
24. Eisenberger M. Exact longitudinal vibration frequencies of a variable cross-section rod. *Applied Acoustics*. 1991; 34:123-130.
25. Bapat CN. Vibration of rods with uniformly tapered sections. *Journal of Sound and Vibration*. 1995; 185:185-189.
26. Abrate S. Vibration of non-uniform rods and beams. *Journal of Sound and Vibration*. 1995; 185:703-716.
27. Kumar BM, Sujith RI. Exact solutions for the longitudinal vibration of non-uniform rods. *Journal of Sound and Vibration*. 1997; 207:721-729.
28. Li QS. Exact solutions for free longitudinal vibrations of non-uniform rods. *Journal of Sound and Vibration*. 2000; 234:1-19.
29. Li QS. Torsional vibration of multi-step non-uniform rods with various concentrated elements. *Journal of Sound and Vibration*. 2003; 260:637-651.
30. Sankin YN, Yuganova NA. Longitudinal vibrations of elastic rods of stepwise-variable cross-section colliding with a rigid obstacle. *Journal of Applied Mathematics and Mechanics*. 2001; 65:427-433.
31. Nachum S, Altus E. natural frequencies and mode shapes of deterministic and stochastic non-homogeneous rods and beams. *Journal of Sound and Vibration*. 2007; 302:903-924.
32. Calio I, Elishakoff I. Vibration tailoring of inhomogeneous rod that posses a trigonometric fundamental mode shape. *Journal of Sound and Vibration*. 2008; 309:838-842.
33. Fedorchenko AI, Stachiv I, Wang AB, Wang WC. Fundamental frequencies of mechanical systems with piecewise constant mechanical. *Journal of Sound and Vibration*. 317:490-495.
34. Fedorchenko AI, Stachiv I, Wang AB. On normal modes of vibrating 1-D mechanical systems with discontinuous properties. *Mechanics of Advanced Materials and Structures*. 2012; 19:265-270.

Citation: Ivo Stachiv (2016) Spectrum of the Torsional and Longitudinal Natural Frequencies of Cantilever with an Arbitrary Number of Layers with the Piece wise Constant Mechanical Properties, Densities and Thicknesses. *JApI Theol* 1(2): 1-4.

35. Zhang WM, Hu KM, Peng ZK, Meng G. Tunable Micro- and Nanomechanical Resonators. *Sensors*. 2015; 15:26478-26566.
36. Fedorchenko AI, Stachiv I, Wang AB. The optical viscometer based on the vibrating fiber partially submerged in fluid. *Sensors and Actuators B: Chemical*. 2008; 147:498-503.
37. Carslaw HS, Jaeger JC. *Operational methods in applied mathematics*. Oxford: Oxford University Press; 1963.
38. Bartsch HJ. *Handbook of Mathematical Formulas*. New York: Academic Press; 1974.